


Further Information

Diameter (d)	Pitch	dk	k	s (nom)	t (min)	b (max)
M1.4	0.30	2.60-2.46	1.40-1.26	1.3	0.6	14
M1.6	0.35	3.00-2.86	1.60-1.46	1.5	0.7	15
M2	0.40	3.80-3.62	2.00-1.86	1.5	1.0	16
M2.5	0.45	4.50-4.32	2.50-2.36	2.0	1.1	17
M3	0.50	5.50-5.32	3.00-2.86	2.5	1.3	18
M3.5	0.60	6.00-5.82	3.50-3.36	2.5	1.6	20
M4	0.70	7.00-6.78	4.00-3.82	3.0	2.0	20
M5	0.80	8.50-8.28	5.00-4.82	4.0	2.5	22
M6	1.00	10.00-9.78	6.00-5.70	5.0	3.0	24
M8	1.25	13.00-12.73	8.00-7.64	6.0	4.0	28
M10	1.50	16.00-15.73	10.00-9.64	8.0	5.0	32
M12	1.75	18.00-17.73	12.00-11.57	10	6.0	36
M14	2.00	21.00-20.67	14.00-13.57	12	7.0	40
M16	2.00	24.00-23.67	16.00-15.57	14	8.0	44
M18	2.5	27.00-26.67	18.00-17.57	14	9.0	48
M20	2.50	30.00-29.67	20.00-19.48	17	10	52
M22	2.50	33.00-32.61	22.00-21.48	17	11	56
M24	3.00	36.00-35.61	24.00-23.48	19	12	60
M27	3.00	40.00-39.61	27.00-26.48	19	13.5	66
M30	3.50	45.00-44.61	30.00-29.48	22	15.5	72

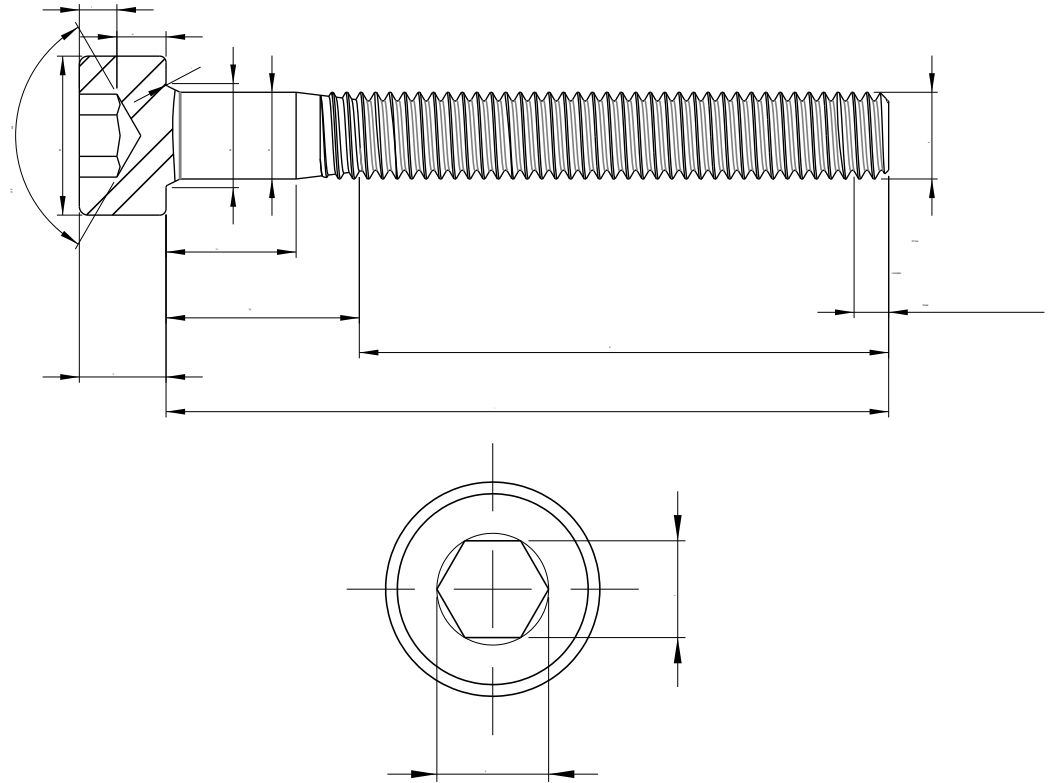

 PRECISION TECHNOLOGY SUPPLIES Stainless Steel Industrial Fastenings & Precision Turned Parts	Part No. A91202506
www.pts-uk.com +44 (0)1342 410758	M2.5 X 6 SOCKET CAP SCREW DIN 912 / ISO 4762 A2 STAINLESS STEEL
Information in this drawing is provided for reference only	