
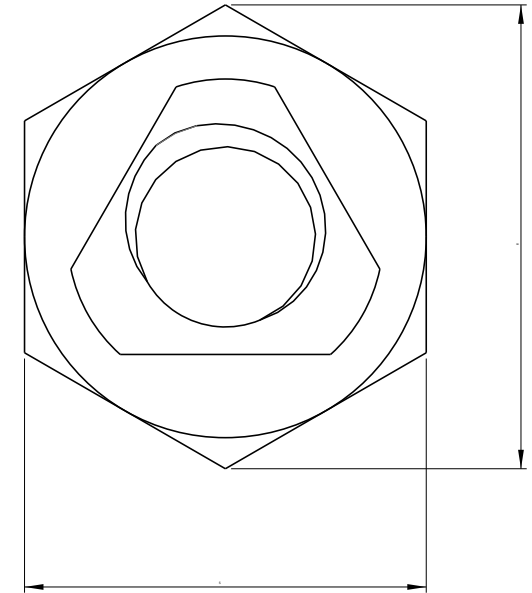
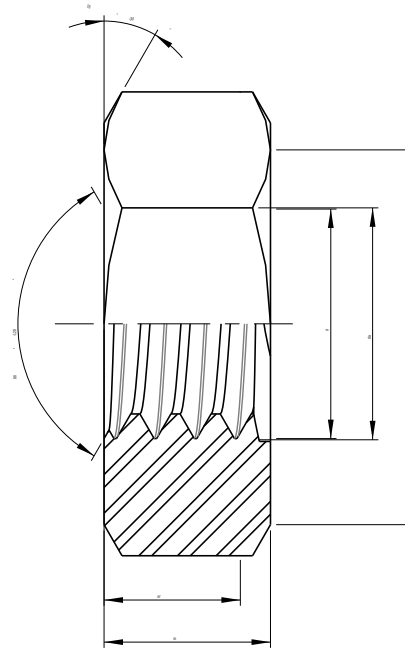


## Further Information

| Diameter (d) | Pitch | s           | m (nom) |
|--------------|-------|-------------|---------|
| M3           | 0.50  | 5.50-5.32   | 2.40    |
| M4           | 0.70  | 7.00-6.78   | 3.20    |
| M5           | 0.80  | 8.00-7.78   | 4.00    |
| M6           | 1.00  | 10.00-9.78  | 5.00    |
| M8           | 1.25  | 13.00-12.73 | 6.50    |
| M10          | 1.50  | 17.00-16.73 | 8.00    |
| M12          | 1.75  | 19.00-18.67 | 10.00   |
| M16          | 2.00  | 24.00-23.67 | 13.00   |
| M20          | 2.50  | 30.00-29.16 | 16.00   |
| M24          | 3.00  | 36.00-35.00 | 19.00   |



|                                                                                                                                                                                              |                                                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|
|  <b>PRECISION TECHNOLOGY SUPPLIES</b><br>Stainless Steel Industrial Fastenings & Precision Turned Parts | Part No. <b>A98012A4</b>                                    |
| <a href="http://www.pts-uk.com">www.pts-uk.com</a><br>+44 (0)1342 410758                                                                                                                     | M12 ALLMETAL SELF LOCKING<br>NUT Sim.980 A4 STAINLESS STEEL |
| Information in this drawing is provided for reference only                                                                                                                                   |                                                             |