
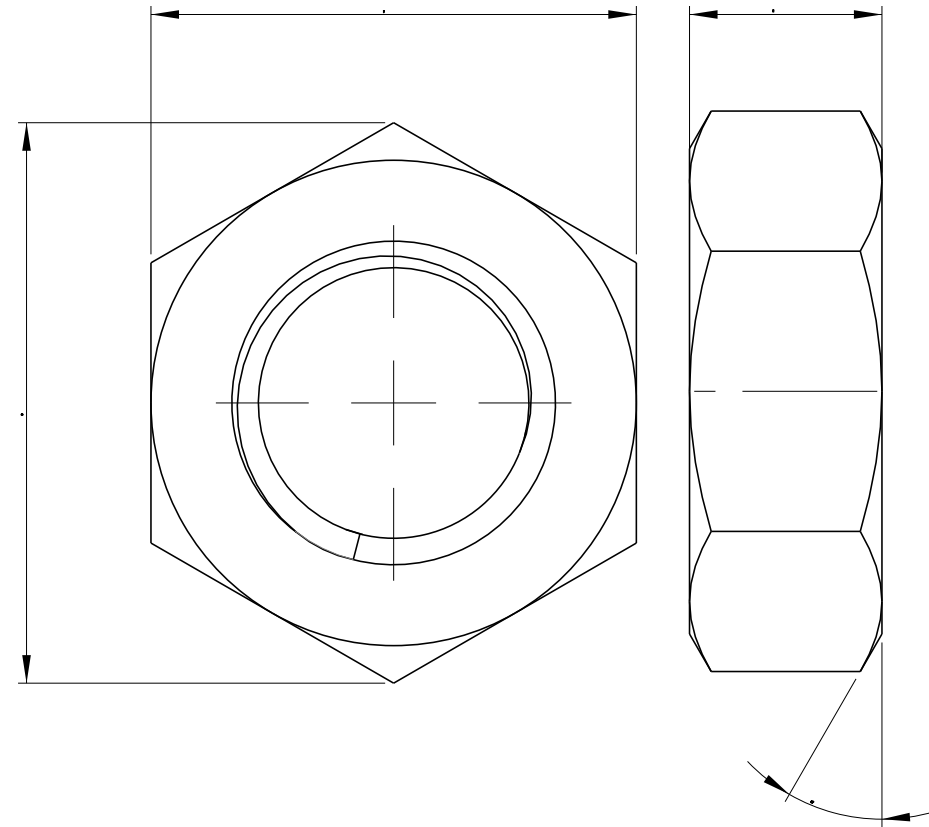


## Further Information

| Thread | T.P.I UNC | T.P.I UNF | f (max) | h (max) |
|--------|-----------|-----------|---------|---------|
| 1/4    | 20        | 28        | 0.438   | 0.163   |
| 5/16   | 18        | 24        | 0.500   | 0.195   |
| 3/8    | 16        | 24        | 0.562   | 0.227   |
| 7/16   | 14        | 20        | 0.688   | 0.260   |
| 1/2    | 13        | 20        | 0.750   | 0.323   |
| 9/16   | 12        | 18        | 0.875   | 0.324   |
| 5/8    | 11        | 18        | 0.938   | 0.387   |
| 3/4    | 10        | 16        | 1.125   | 0.446   |
| 7/8    | 9         | 14        | 1.312   | 0.510   |
| 1"     | 8         | 12        | 1.500   | 0.575   |
| 1.1/4" | 7         | 12        | 1.875   | 0.782   |
| 1.1/2" | 6         | 12        | 2.250   | 0.911   |



|                                                                                                                                                                                                                 |                                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|
|  <b>PRECISION TECHNOLOGY SUPPLIES</b><br><small>Stainless Steel Industrial Fastenings &amp; Precision Turned Parts</small> | Part No. <b>U4391220</b>                                          |
| <a href="http://www.pts-uk.com">www.pts-uk.com</a><br>+44 (0)1342 410758                                                                                                                                        | 1/2-20 UNF HEXAGON LOCK NUT<br>ASME B18.2.2 A2 STAINLESS<br>STEEL |
| Information in this drawing is provided for reference only                                                                                                                                                      |                                                                   |