



## Further Information

Thread	T.P.I UNCT.	P.I UNF	a	h	o (max)	j (max)	t (max)
0	*	80	0.096-0.0	0.043-0.0	0.055	0.023	0.025
			83	38			
1	64	72	0.118-0.1	0.053-0.0	0.066	0.026	0.031
			04	45			
2	56	64	0.140-0.1	0.062-0.0	0.083	0.031	0.037
			24	53			
3	48	56	0.161-0.1	0.070-0.0	0.095	0.035	0.043
			45	61			
4	40	48	0.183-0.1	0.079-0.0	0.107	0.039	0.048
			66	69			
5	40	44	0.205-0.1	0.088-0.0	0.120	0.043	0.054
			87	78			
6	32	40	0.226-0.2	0.096-0.0	0.132	0.048	0.060
			08	86			
8	32	36	0.270-0.2	0.113-0.1	0.156	0.054	0.071
			50	02			
10	24	32	0.313-0.2	0.130-0.1	0.180	0.060	0.083
			92	18			
12	24	28	0.357-0.3	0.148-0.1	0.205	0.067	0.094
			34	34			
1/4	20	28	0.414-0.3	0.170-0.1	0.237	0.075	0.109
			89	55			
5/16	18	24	0.518-0.4	0.211-0.1	0.295	0.084	0.137
			90	94			
3/8	16	24	0.622-0.5	0.253-0.2	0.355	0.094	0.164
			90	33			

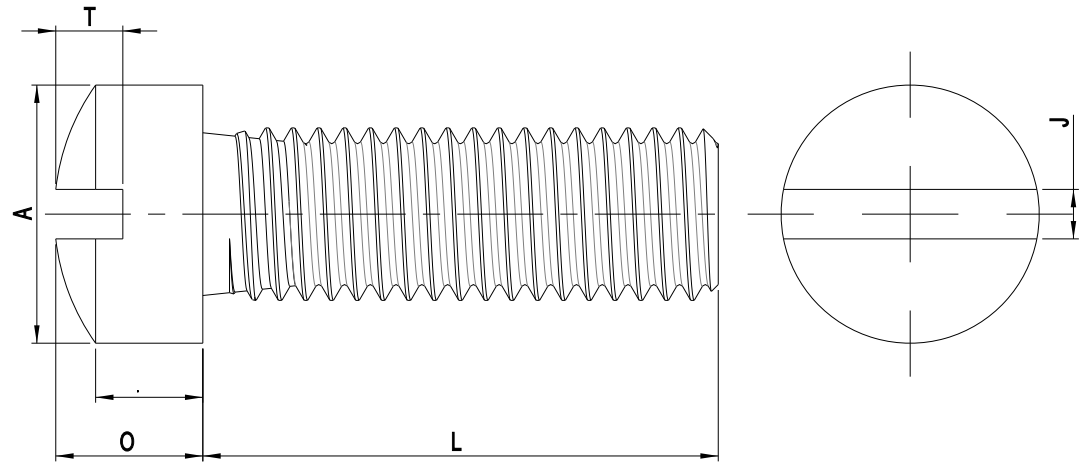

 <b>PRECISION TECHNOLOGY SUPPLIES</b> <small>Stainless Steel Industrial Fastenings &amp; Precision Turned Parts</small>	<b>Part No. U846400437</b>
<a href="http://www.pts-uk.com">www.pts-uk.com</a> +44 (0)1342 410758	<b>6-40 UNF X 7/16 SLOT FILLISTER                  MACHINE SCREW ASME B18.6.3                  A2 STAINLESS STEEL</b>
Information in this drawing is provided for reference only	