


## Further Information

| Diameter (d) | d1   | d2            | h          |
|--------------|------|---------------|------------|
| M1.6         | 1.7  | 4.00-3.70     | 0.35-0.25  |
| M1.7         | 1.8  | 4.50-4.20     | 0.35-0.25  |
| M2           | 2.2  | 5.00-4.70     | 0.35-0.25  |
| M2.5         | 2.7  | 6.00-5.70     | 0.55-0.45  |
| M3           | 3.2  | 7.00-6.64     | 0.55-0.45  |
| M3.5         | 3.7  | 8.00-7.64     | 0.55-0.45  |
| M4           | 4.3  | 9.00-8.64     | 0.90-0.70  |
| M5           | 5.3  | 10.00-9.64    | 1.10-0.90  |
| M6           | 6.4  | 12.00-11.57   | 1.80-1.40  |
| M7           | 7.4  | 14.00-13.57   | 1.80-1.40  |
| M8           | 8.4  | 16.00-15.57   | 1.80-1.40  |
| M10          | 10.5 | 20.00-19.48   | 2.20-1.80  |
| M12          | 13   | 24.00-23.48   | 2.70-2.30  |
| M14          | 15   | 28.00-27.48   | 2.70-2.30  |
| M16          | 17   | 30.00-29.48   | 3.30-2.70  |
| M18          | 19   | 34.00-33.38   | 3.30-2.70  |
| M20          | 21   | 37.00-36.38   | 3.30-2.70  |
| M22          | 23   | 39.00-38.38   | 3.30-2.70  |
| M24          | 25   | 44.00-43.38   | 4.30-3.70  |
| M27          | 28   | 50.00-49.38   | 4.30-3.70  |
| M30          | 31   | 56.00-55.26   | 4.30-3.70  |
| M33          | 34   | 60.00-58.80   | 5.60-4.40  |
| M36          | 37   | 66.00-64.80   | 5.60-4.40  |
| M39          | 40   | 72.00-70.80   | 6.60-5.40  |
| M42          | 43   | 78.00-76.80   | 8.00-6.00  |
| M45          | 46   | 85.00-83.60   | 8.00-6.00  |
| M48          | 50   | 92.00-90.60   | 9.00-7.00  |
| M52          | 54   | 98.00-96.60   | 9.00-7.00  |
| M56          | 58   | 105.00-103.60 | 10.00-8.00 |

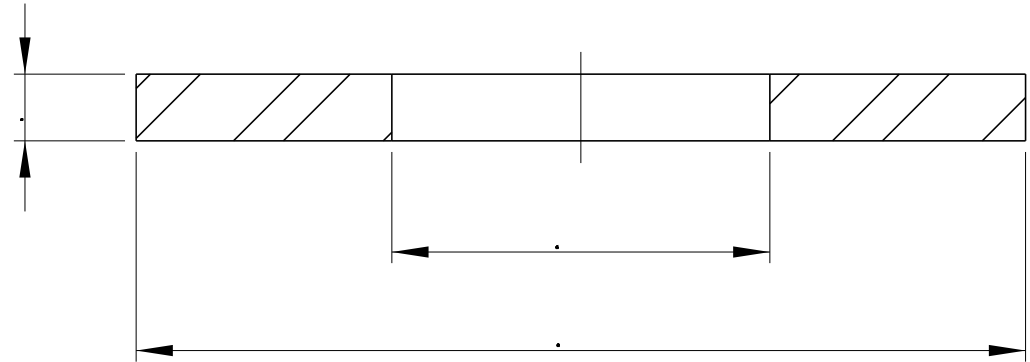

|                                                                                                                                                                                                                 |                                                              |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|
|  <b>PRECISION TECHNOLOGY SUPPLIES</b><br><small>Stainless Steel Industrial Fastenings &amp; Precision Turned Parts</small> | Part No. <b>A12539AA4</b>                                    |
| <a href="http://www.pts-uk.com">www.pts-uk.com</a><br>+44 (0)1342 410758                                                                                                                                        | <b>M39 FORM A FLAT WASHER DIN<br/>125 A4 STAINLESS STEEL</b> |
| Information in this drawing is provided for reference only                                                                                                                                                      |                                                              |