


Further Information

Thread	T.P.I UNC	T.P.I UNF	a (max)	c (max)	d (min)
2	56	64	0.251	0.153	0.081
3	48	56	0.251	0.153	0.081
4	40	48	0.251	0.153	0.081
5	40	44	0.251	0.153	0.081
6	32	40	0.313	0.188	0.103
8	32	36	0.345	0.239	0.140
10	24	32	0.376	0.249	0.140
12	24	28	0.439	0.328	0.225
1/4	20	28	0.439	0.328	0.225
5/16	18	24	0.502	0.359	0.250
3/8	16	24	0.564	0.468	0.335
7/16	14	20	0.627	0.468	0.324
1/2	13	20	0.752	0.609	0.464
9/16	12	18	0.877	0.656	0.469
5/8	11	18	0.940	0.765	0.593
3/4	10	16	1.064	0.890	0.742
7/8	9	14	1.252	0.999	0.790
1"	8	12	1.440	1.078	0.825

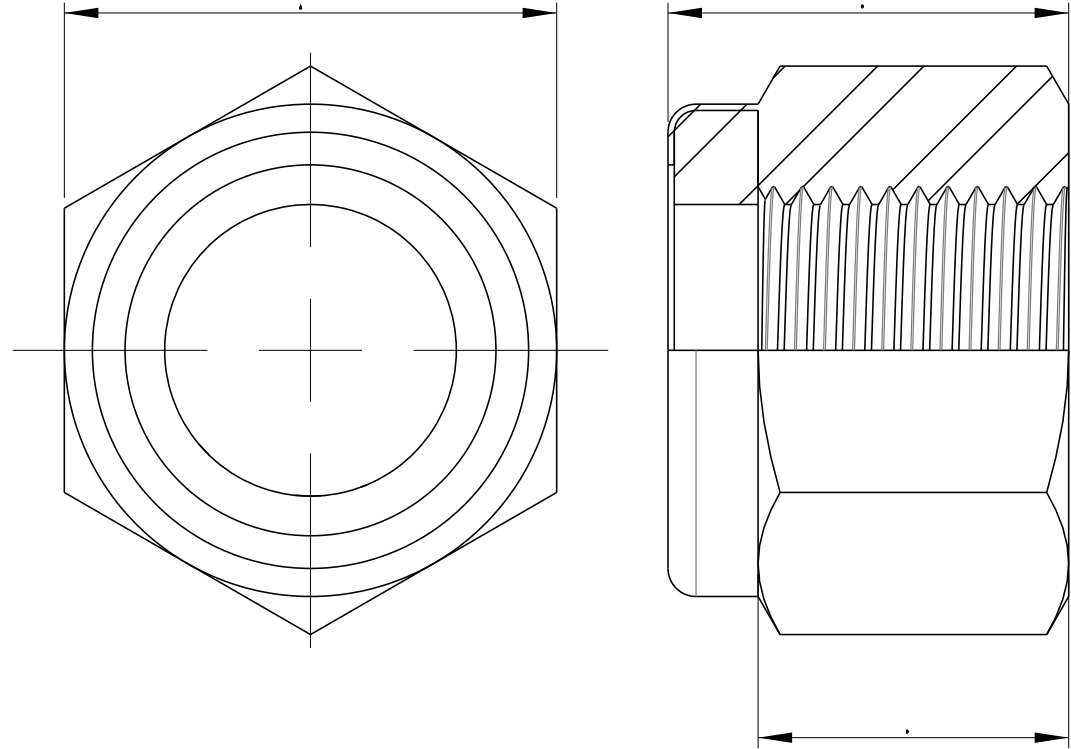

 PRECISION TECHNOLOGY SUPPLIES Stainless Steel Industrial Fastenings & Precision Turned Parts	Part No. U9853816A4
www.pts-uk.com +44 (0)1342 410758	3/8-16 UNC NYLON INSERT NUT ASME B18.16.6 A4 STAINLESS STEEL
Information in this drawing is provided for reference only	