


## Further Information

| Thread | T.P.I UNC | T.P.I UNF | a (max) | c (max) | d (min) |
|--------|-----------|-----------|---------|---------|---------|
| 2      | 56        | 64        | 0.251   | 0.153   | 0.081   |
| 3      | 48        | 56        | 0.251   | 0.153   | 0.081   |
| 4      | 40        | 48        | 0.251   | 0.153   | 0.081   |
| 5      | 40        | 44        | 0.251   | 0.153   | 0.081   |
| 6      | 32        | 40        | 0.313   | 0.188   | 0.103   |
| 8      | 32        | 36        | 0.345   | 0.239   | 0.140   |
| 10     | 24        | 32        | 0.376   | 0.249   | 0.140   |
| 12     | 24        | 28        | 0.439   | 0.328   | 0.225   |
| 1/4    | 20        | 28        | 0.439   | 0.328   | 0.225   |
| 5/16   | 18        | 24        | 0.502   | 0.359   | 0.250   |
| 3/8    | 16        | 24        | 0.564   | 0.468   | 0.335   |
| 7/16   | 14        | 20        | 0.627   | 0.468   | 0.324   |
| 1/2    | 13        | 20        | 0.752   | 0.609   | 0.464   |
| 9/16   | 12        | 18        | 0.877   | 0.656   | 0.469   |
| 5/8    | 11        | 18        | 0.940   | 0.765   | 0.593   |
| 3/4    | 10        | 16        | 1.064   | 0.890   | 0.742   |
| 7/8    | 9         | 14        | 1.252   | 0.999   | 0.790   |
| 1"     | 8         | 12        | 1.440   | 1.078   | 0.825   |

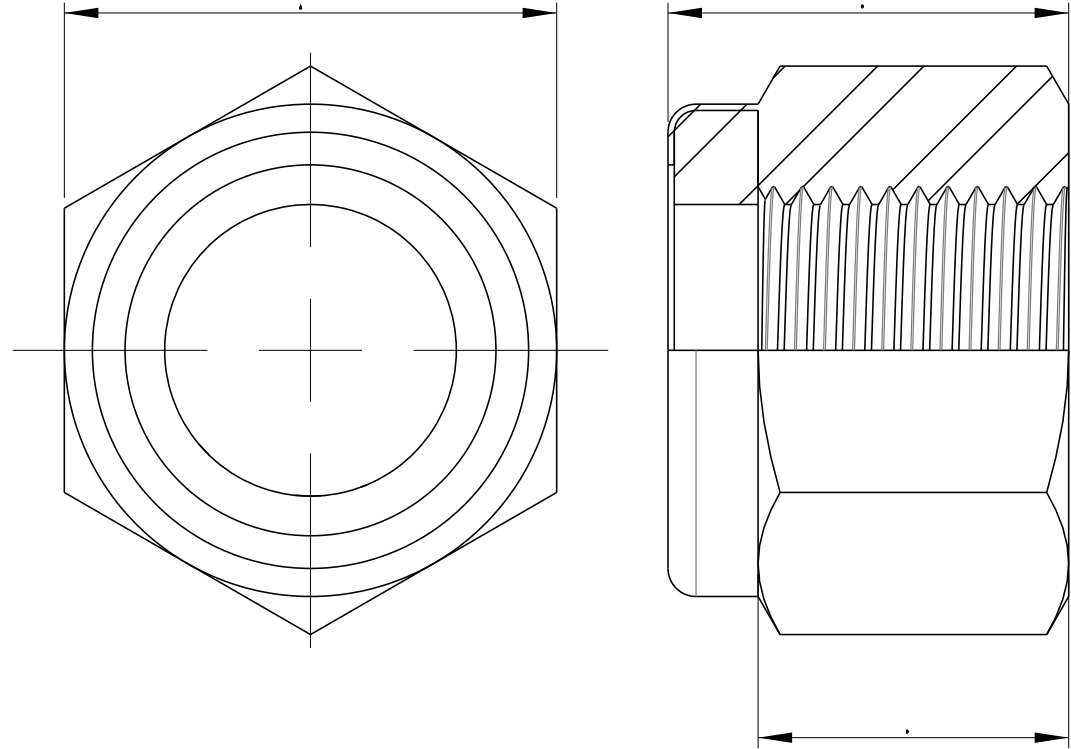

|                                                                                                                                                                                                                 |                                                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
|  <b>PRECISION TECHNOLOGY SUPPLIES</b><br><small>Stainless Steel Industrial Fastenings &amp; Precision Turned Parts</small> | Part No. <b>U9853824</b>                                           |
| <a href="http://www.pts-uk.com">www.pts-uk.com</a><br>+44 (0)1342 410758                                                                                                                                        | 3/8-24 UNF NYLON INSERT NUT<br>ASME B18.16.6 A2 STAINLESS<br>STEEL |
| Information in this drawing is provided for reference only                                                                                                                                                      |                                                                    |